

Competence and Knowledge – Our Strength, Your Advantage

Coating Thickness Measuring Instrument for Universal Use


Quality Control of PC-Boards and Electroplated Surfaces



Measurement Method

The PHASCOPE PMP10 utilizes the phase-sensitive eddy-current method according to the standard ISO 21968. Compared to conventional eddy-current method according to ISO 2360, this measuring method has significant advantages for the thickness measurement of metallic surface coatings.

By using the phase position of the probe signal instead of the amplitude for the coating thickness computation, the interfering influences of the specimen shape and of the probe lift-off are significantly reduced. This is illustrated in the figure to the right.

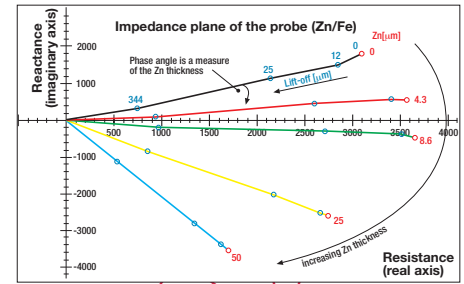

Copper Coating Measurements For PC-Board Production

Available probes:

- ESL080B and ESL080V for Cu thickness measurements in PC-board boreholes in a range from 5 – 80 μm (0.2 – 3.2 mils).
- ESD20Cu for surface copper thickness measurements on PC-boards.
1 – 100 μm (0.04 – 4 mils) at 240 kHz
1 – 270 μm (0.04 – 10.8 mils) at 60 kHz



PMP10 with borehole calibration boards, probe ESL080B and printer.



Copper cladding thickness measurement in boreholes using the probe ESL080V.


Measurement of Non-Ferrous Metal Coatings on Steel, NF or Iso Substrate Materials

The following probes are available:

- ESD20Cu for the measurement of non-ferrous metal (NF) coatings of Cu, Al, brass, etc. on electr. non-conducting (Iso) substrate materials.
- ESD20Zn for NF coatings on steel or iron, in particular with rough surfaces, or for NF coatings with a high electr. conductivity on NF substrate materials with a low conductivity, e.g., Cu/brass.
- ESD20Ni for Ni/Fe
1 – 50 μm (0.04 – 2 mils) at 240 kHz
2 – 100 μm (0.08 – 4 mils) at 60 kHz
- ESD2.4 for Zn/Fe on small parts



Probe ESD2.4 is particularly well suited for small parts, because a calibration with adjustment to the measuring spot geometry is typically not required.

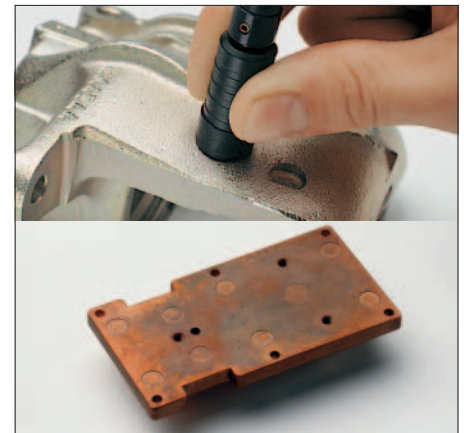

Measurements on rough surfaces (top image: Zn/Fe with EDS20Zn) or NF coatings on NF base (bottom image: Cu/brass).

© Helmut Fischer GmbH+Co.KG

Subject to change.

912-022

Printed in Germany

04/07

Helmut Fischer GmbH+Co.KG
Industriestraße 21
71069 Sindelfingen, Germany
Tel. +49 70 31 30 30
Fax +49 70 31 30 379
mail@helmut-fischer.de
Internet: www.Helmut-Fischer.com



Fischer Instrumentation (G.B.) Ltd.
Gordleton Industrial Park
Hannah Way, Pennington
Lymington/Hampshire SO41 8JD, England
Tel. +44 15 90 68 41 00, Fax +44 15 90 68 41 10
Internet: www.fischergb.co.uk
E-Mail: mail@fischergb.co.uk



Fischer Technology, Inc.
750 Marshall Phelps Road
Windsor, CT 06095, USA
Tel. +1 86 06 83 - 07 81, Fax +1 86 06 88 - 84 96
Internet: www.fischer-technology.com
E-Mail: info@fischer-technology.com



Sole Agent for Helmut Fischer GmbH+Co.KG, Germany:

Helmut Fischer Elektronik und Messtechnik AG
CH-6331 Hünenberg, Switzerland
Tel. +41 41 785 08 00, Fax +41 41 785 08 01
E-Mail: switzerland@helmutfischer.com

Branch Offices of Helmut Fischer AG, Switzerland:

Fischer Instrumentation Electronique
78180 Montigny le Bretonneux, France
Tel. +33 1 30 58 00 58, Fax +33 1 30 58 89 50
E-Mail: france@helmutfischer.com

Helmut Fischer S.R.L., Tecnica di Misura
20128 Milano, Italy
Tel. +39 0 22 55 26 26, Fax +39 0 22 57 00 39
E-Mail: italy@helmutfischer.com

Fischer Instruments, S.A.
08018 Barcelona, Spain
Tel. +34 9 33 09 79 16, Fax +34 9 34 85 05 94
E-Mail: spain@helmutfischer.com

Helmut Fischer Meettechnik B.V.
5627 GB Eindhoven, The Netherlands
Tel. +31 4 02 48 22 55, Fax +31 4 02 42 88 85
E-Mail: netherlands@helmutfischer.com

Fischer Instruments K.K.
Saitama-ken 340-0012, Japan
Tel. +81 4 89 29 34 55, Fax +81 4 89 29 34 51
E-Mail: japan@helmutfischer.com

Fischer Instrumentation (Far East) Ltd.
Kwai Chung, N.T., Hong Kong
Tel. +852 24 20 11 00, Fax +852 24 87 02 18
E-Mail: hongkong@helmutfischer.com

Fischer Instrumentation (S) Pte Ltd.
Singapore 118529, Singapore
Tel. +65 62 76 67 76, Fax +65 62 76 76 67
E-Mail: singapore@helmutfischer.com

Nantong Fischer Instrumentation Ltd.
Shanghai 200437, P.R.C., China
Tel. +86 21 65 55 74 55, Fax +86 21 65 55 24 41
E-Mail: china@helmutfischer.com

Fischer Measurement Technologies (India) Pvt. Ltd.
Pune 411036, India
Tel. +91 20 26 82 20 65, Fax +91 20 26 82 20 75
E-Mail: india@helmutfischer.com



ISO 9001
SQS Registration
No 11899
Valid for Fischer AG and Branch Offices

